


PHL 55 GABLE SCREEN

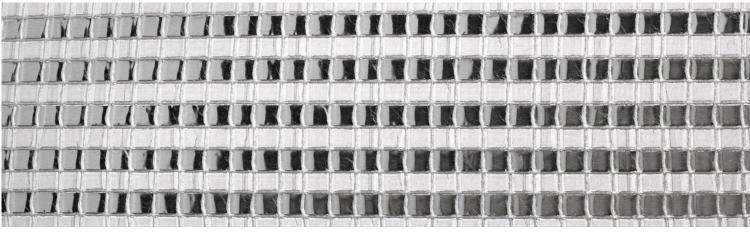

Technical data sheet

Product description

| Type of product | Laminated woven fabric | Application | Indoor |
|-----------------|------------------------|-------------|--------|
| Colour | Aluminum/Diffuse | Material | Alu/PE |

Properties

| Physical Properties | Standard | Performance | Tolerance | |
|---------------------------|-------------------------------|--------------|------------|--|
| Weight | EN ISO 9864 | 131 g/m² | ±13,1 g/m² | |
| Length | | As required | | |
| Roll Width | | 190-230 cm | ±2 cm | |
| | | 74,8-90,5 in | ±0,8 in | |
| Mechanical Properties | Standard | Performance | | |
| Energy saving | Phormium test method | 65 % | | |
| Direct Light transmission | Phormium test method | 41 % | | |
| Shading | Phormium test method | 59 % | | |
| Shrinkage | 2h at 70°C | ≤1 % | | |
| Durability | Standard | Performance | | |
| | DIN 4102 | - | | |
| El anno a na h-mal an h | NTA 8825 | - | | |
| Flame retardant | ASTM E 84 | - | | |
| | NFPA 701 - 2015 Test Method 2 | - | | |

Warranty

Under all types of greenhouse covering 8 years, see Phormiums limited warranty for all terms, conditions, and exclusions in writing.

Remarks

The information set forth in this data sheet reflects the best knowledge at the time of publication. The document is subject to change pursuant to new developments and findings. The same reservation applies to the properties of the products described. No liability is undertaken for results obtained by usage of the products and information.

-

TGU GmbH & Co. KG

www.tgu-shop.com

info@tgu-greven.com