

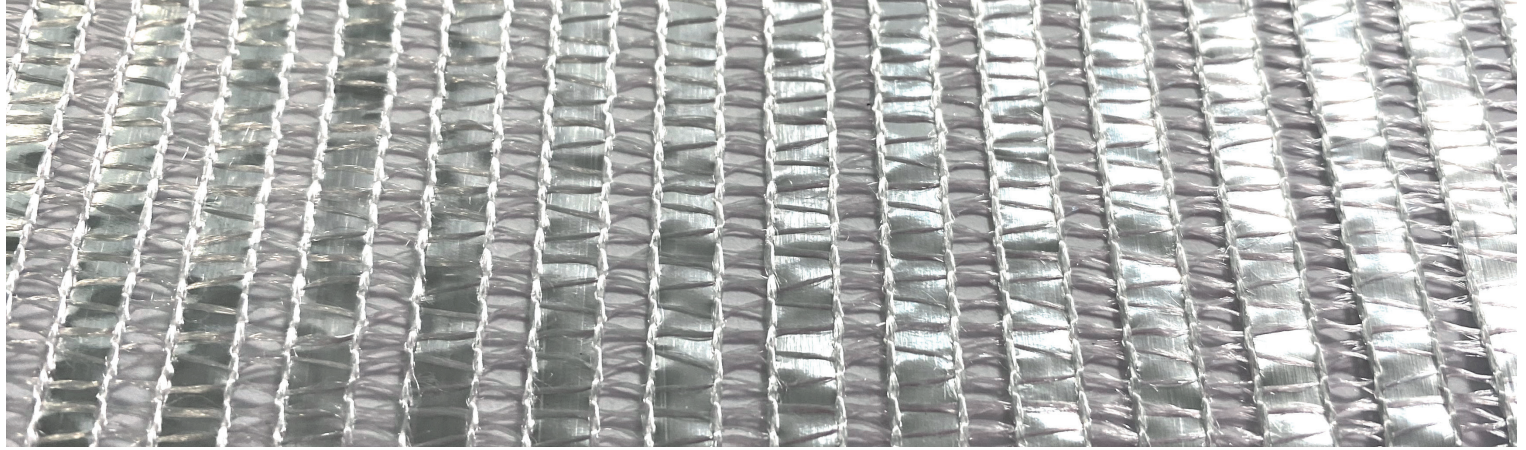


ECOSCREEN ES 15 OPEN
SHADING- & ENERGY-SAVING-SCREEN



Technical Datasheet



Type of product	Knitted fabric	Application	Indoor
Color	Pattern: aluminum transparent	Material	21% PET film, 15% aluminum film, 64% PET yarn

Properties	Standard	Performance	Tolerance
Weight g/m²		81	
Widths (of strip) in mm		3,84	
Length		200 m	
Shading from direct light		50 %	
Energy saving		25 %	
Shrinkage (2h-70 C)	2h 70°C	1 %	
Tensile strength (N)		260N (warp) 300N (weft)	

Warranty
Under all types of greenhouse covering and middle European climate conditions 5 years, see our limited warranty for all terms, conditions, and exclusions in writing.

The information contained in this data sheet corresponds to the state of knowledge at the time of publication. The document may be changed due to new developments and findings. Some reservations refer to the properties of the products described. No liability is accepted for the results obtained by using the products and information.